

Widely Adjustable Filter

10.0 - 15.0 GHz




Main Electrical & Mechanical Characteristics

Frequency Range	10.0 ÷ 15.0 GHz
Bandwidth	100 MHz (Broad version - 300 MHz - available)
Attenuation	> 20 dB @ ± 150 MHz
	> 25 dB @ ± 400 MHz (Broad version)
Insertion Loss	< 1.5 dB (< 1.0 dB Broad version)
Return Loss	> 20 dB (> 18 dB Broad version)
Dimensions	84 x 25 x 12.5 mm
Connectors	SMA-Female

Measured Frequency Response

At the lower limit of the frequency range

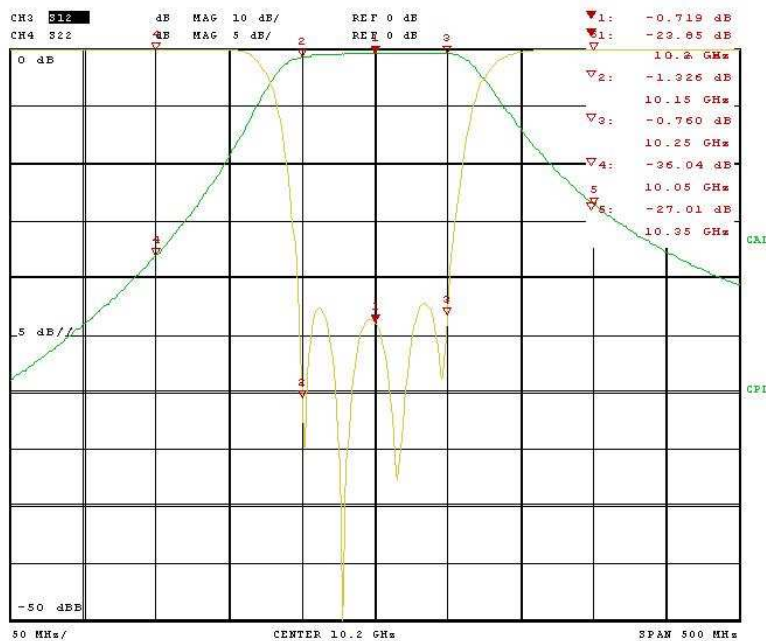

At the higher limit of the frequency range

